NEW

self stabilizing system









SA18
SA18 HB

OPTIONELLE / OPTIONAL

PANIER ROTATIF
BASKET ROTATION

OPTIONELLE / OPTIONAL


RADIOCOMMANDE
RADIO REMOTE CONTROL






TRACKED AERIAL WORK PLATFORM / NACELLE ÉLÉVATRICE SUR CHENILLES
RAUPEN-ARBEITSBÜHNE / PLATAFORMA DE ORUGA PARA TRABAJOS EN ALTURA

BLUELIFT
PIATTAFORME AEREE

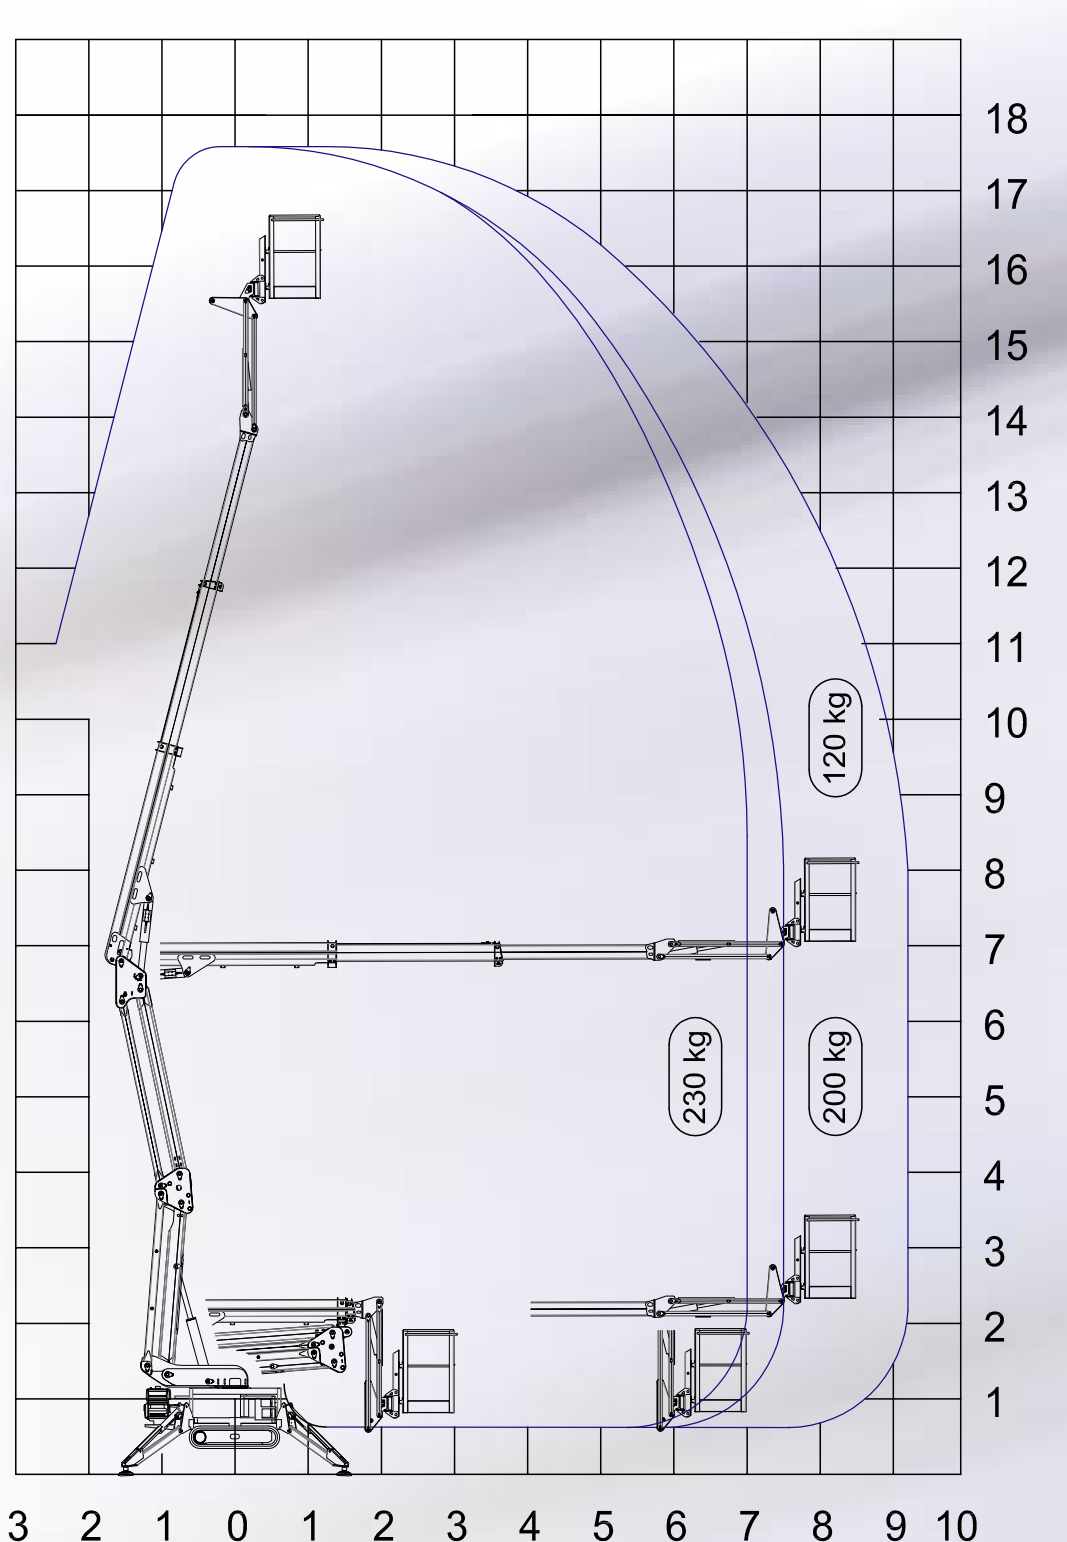

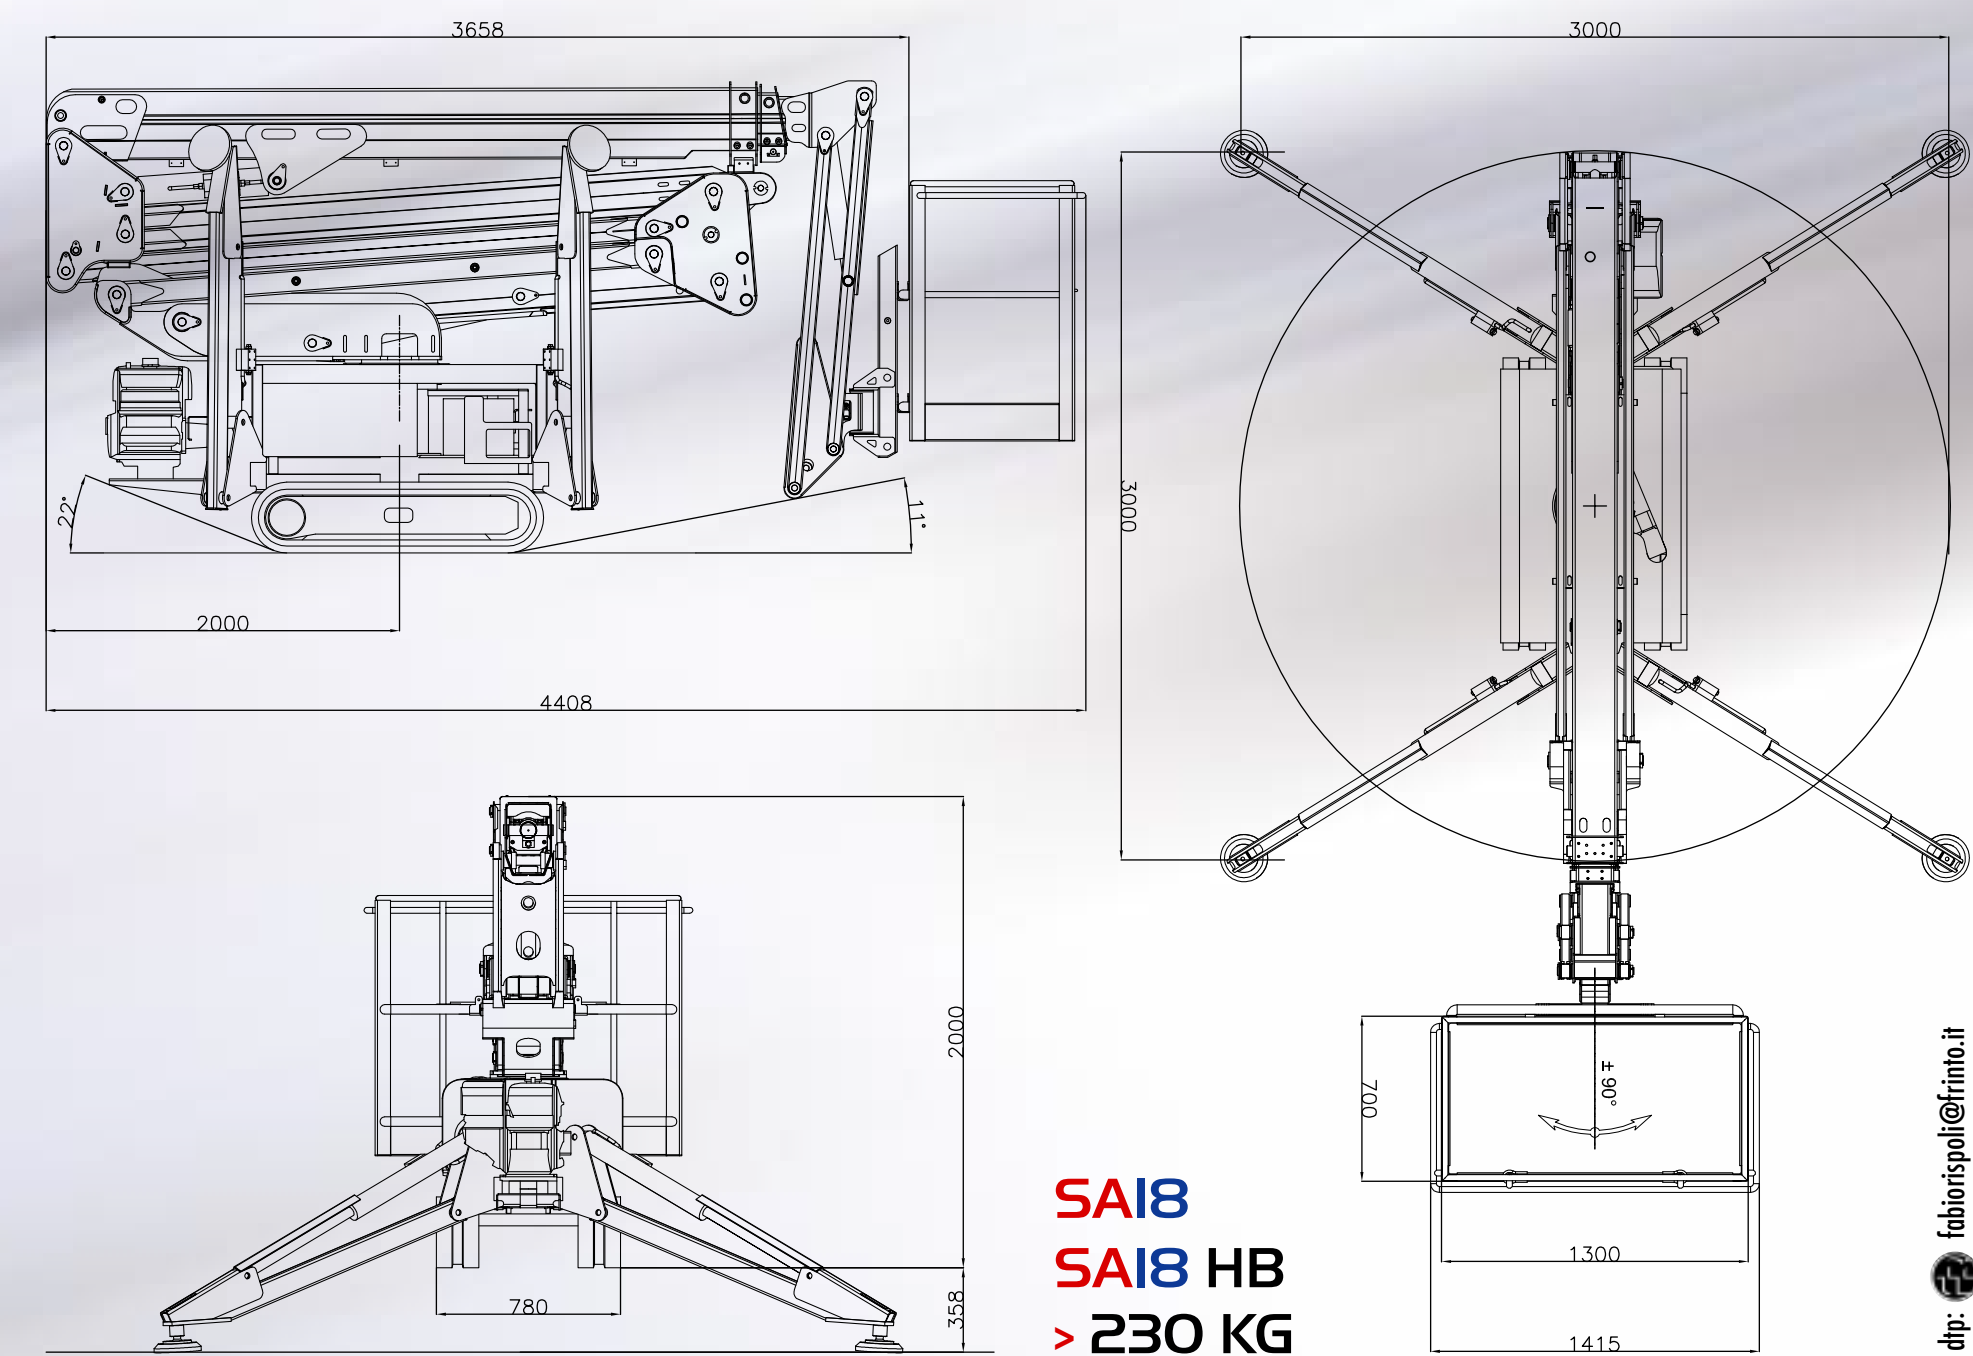



self stabilizing system



SPECIFICATIONS	SA18	SA18 HB
Hauteur de travail maximale	17,80 m	17,80 m
Deport de travail maximal	9,3 m/120 kg 7,5 m/200 kg 7,0 m/230 kg	9,3 m/150 kg 8,0 m/200 kg 7,5 m/230 kg
Capacité de charge (Operateurs)	230 kg (2 personnes)	230 kg (2 personnes)
Panier aluminium	1300 x 700 x 1100 mm	1300 x 700 x 1100 mm
Poids de la machine	1950 kg	2200 kg
Rotation de la tourelle	340° non continue	340° non continue
Rotation du panier (optionnel)	180°	180°
Angle jib hydraulique	-100°/10°	-100°/10°
Vitesse de translation maximale	1,5 km/h	1,5 km/h
Pente franchissable maximale	28%	28%

EQUIPMENT STANDARD
- Bras double pantograph, bras télescopique à 3 sections + jib hydraulique
- Panier aluminium à démontage rapide
- Nivelage du panier par système hydraulique à circuit fermé
- Prise de courant 220V dans le panier avec relais différentiel
- Panier équipé d'oeillets pour la fixation des harnais de sécurité
- Boîtier de commande à 5 manettes dans le panier
- Télécommande à câble pour la translation
- Priorité pour les commandes du panier
- Transmission électrohydraulique
- Commandes proportionnelles
- Bouton d'arrêt d'urgence avec arrêt du moteur
- Mécanisme de limitation de couple
- Détection automatique de la position centrée de la tourelle
- Blocage réciproque entre stabilisateurs et bras
- Stabilisateurs escamotables à fonctionnement hydraulique
- Protections sur les vérins des stabilisateurs
- Système de nivelage automatique
- Voyants pour la signalisation de stabilisation effectuée
- Horamètre
- Moteur essence HONDA 13 CV
- Moteur à système START&STOP automatique
- Pompe élétrique 220V/110V
- Alarme sonore intermittent pendant la translation (traction chenilles)
- Système de traction à doubler vitesse
- Pompe manuelle pour la descente d'urgence de la nacelle
- Carte électronique certifiée par le Tüv et conforme aux normes européennes
- Produit construit conformément à la norme EN280 et aux directives de sécurité internationales
- Manuel d'utilisation et d'entretien

EQUIPMENT OPTIONELLE
- Panier rotatif
- Amenée d'air ou d'eau dans le panier
- Télécommande radiographique
- Moteur essence HONDA 15 CV avec réglage de régime automatique
- Moteur diesel HATZ
- Couleur personnalisée
- Chenilles non marquantes
- Chenilles extensible
- Set de 4 plaques de répartition spéciales

SPECIFICATIONS	SA18	SA18 HB
Working height	17,80 m	17,80 m
Max outreach	9,3 m/120 kg 7,5 m/200 kg 7,0 m/230 kg	9,3 m/150 kg 8,0 m/200 kg 7,5 m/230 kg
Load capacity (Operators)	230 kg (2 people)	230 kg (2 people)
Basket in aluminium, détachable	1300 x 700 x 1100 mm	1300 x 700 x 1100 mm
Total weight	1950 kg	2200 kg
Turret rotation	340° non continue	340° non continue
Basket rotation (option)	180°	180°
Jib working angle	-100°/10°	-100°/10°
Max translation speed	1,5 km/h	1,5 km/h
Gradeability	28%	28%

EQUIPMENT STANDARD
- Double pantograph boom, 3 section telescopic boom + jib
- Quickly removable aluminium basket
- Hydraulic leveling platform with closed circuit
- 220 V Supply with plug on the platform with earth leakage circuit breaker
- Locks for the safety belts on the platform
- Basket control panel with 5 joystick
- Cable remote control
- Priority of platform controls
- Electro-hydraulic transmission
- Proportional controls
- Emergency push-button with engine stop
- Moment limiting device
- Automatic center position of turret
- Interblock stabilizzators/booms
- Collapsible outriggers with hydraulic descent
- Protection on outrigger cylinders
- Self stabilizing system
- Complete stabilisation warming lights
- Hourmeter
- Petrol engine HONDA 13 CV
- Automatic START & STOP on engine
- Electric pump 220V/110V
- Translation intermittent sound alarm
- Double-speed drive system
- Hand pump for the emergency descent of the platform
- Electronic board certified by TUV and fulfill the new European norms
- Produced according to EN 280 norm and international safety regulations
- Use and maintenance handbook

OPTIONAL
- Basket rotation
- Air/Water tube in basket
- Radio remote control
- Petrol engine HONDA 15 CV with automatic RPM control
- Diesel engine HATZ
- Special color
- No-marking crawlers
- Track width adjusting system
- Set of 4 special outrigger foot plates





BLUELIFT s.r.l.
Via Santa Maria del Piano di Sotto 91/B
Località Santa Maria del Piano
47854 Montescudo (RN) - ITALIA
Tel. +39 0541 756872
Fax +39 0541 729800
info@bluelift.it - bluelift.it